



**FA444-17**

### Package Includes

- ✓ Faucet
- ✓ FA444 Automator
- ✓ Stainless Steel Hose
- ✓ Mounting Hardware
- ✓ **Batteries Pre-installed**
- ✓ *All the hardware necessary for satisfactory installation*
- ✓ **Please Note:** Faucet Sold Without Drain

### Featuring

- ✓ Solid Brass Faucet
- ✓ Lead-Free Construction
- ✓ Matching Electronic Soap Dispenser (Optional)
- ✓ Digital Plug and Play System
- ✓ Resin Encased Control Electronics
- ✓ Battery powered, A/C Option
- ✓ Visible Low Battery Indicator
- ✓ **Available in 22 + Finishes**
- ✓ ADA Compliant
- ✓ Vandal Resistant



ANSI A112.18.1M  
CSA Standard B125, 1.5 U.S. GPM  
NSF/ANSI/CAN61-2022 **Certified**

### Optional Equipment

- ✓ Matching Soap Dispenser
- ✓ Lavatory Drain, Grid and Push-Push Type
- ✓ Deck Plates for 4" and 8" Center Sinks
- ✓ Adjustable Under the Sink Mixing Valve
- ✓ Matching Hole Cap Cover
- ✓ AC Power

### Applications

The model FA444-17 is ideal for decorative commercial and industrial applications. Although the model 17 is **ONE OF THE BEST PRICED** electronic faucets available on the market today, this unique faucet is rated **HEAVY DUTY** and features the Faucet Automator model FA444, Manufactured to last, the **FA444** employs plug and play digital electronics, hermetically sealed sensor capsule with visible low battery indicator, and employs one of the most reliable SOLID BRASS solenoid valves of any electronic faucet.

### Notes

# MAC FAUCETS

When Style Matters




## Industry Standard™ Faucet

### Model: FA444-17

## Specifications and Dimensions

| MODEL                             | FA444-17                                                    |
|-----------------------------------|-------------------------------------------------------------|
| <b>Spout:</b>                     | Lead-Free Solid Brass                                       |
| <b>Power:</b>                     | 4 (AA) Alkaline Batteries or AC Adapter - Optional AC power |
| <b>Battery life expectancy:</b>   | 300,000 cycles                                              |
| <b>Solenoid valve:</b>            | 6 Volts magnet latching                                     |
| <b>Working Water Pressure:</b>    | 1 PSI -100 PSI                                              |
| <b>Supply Inlet Size:</b>         | 1/2" NPT Male                                               |
| <b>Water Temperature Control:</b> | Optional - Choose MAC no. A-12910                           |
| <b>Sink Drain:</b>                | Optional - Many to choose From                              |
| <b>Electronic Soap Dispenser:</b> | Optional - We Recommend PYOS-17 Electronic Soap Dispenser   |
| <b>Sensor Microprocessor:</b>     | Digital, Plug and Play                                      |
| <b>Sensing Range:</b>             | 2" to 6"                                                    |
| <b>Response Time:</b>             | 0.6 Second                                                  |
| <b>Shut-Off Delay Time:</b>       | 3 Second                                                    |
| <b>Maximum Running Time:</b>      | 30 Seconds                                                  |
| <b>Particle filter size:</b>      | 50 Mesh                                                     |
| <b>Aerator:</b>                   | 1.5 GPM. Optional 0.5 GPM, 0.35 GPM                         |

### All Dimensions in Inches

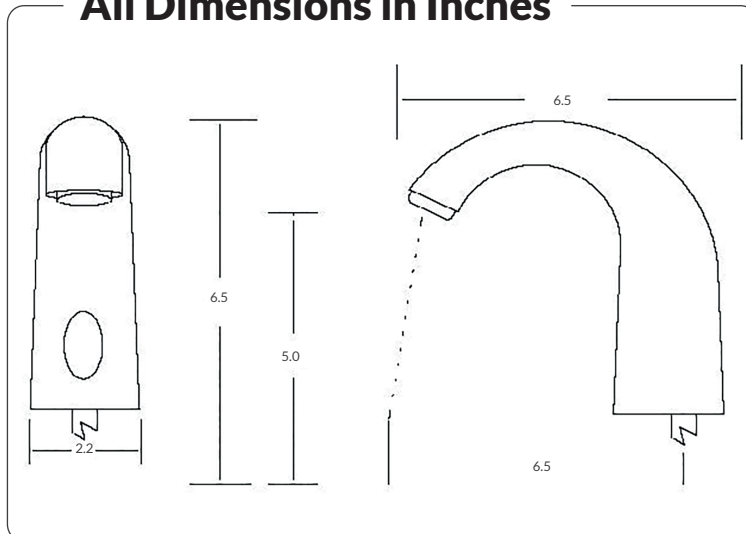

### Rough-in

