MAC FAUCETS
When Style Matters

Specifications

EvrLast™ Flush Valve
Model: AUV-4

Model: AUV-4-1.0 | 1.0 Gallons per flush Application
Model: AUV-4-0.5 | 0.5 Gallons per flush Application
Model: AUV-4-0.25 | 0.25 Gallons per flush Application
Model: AUV-4-0.125 | 0.125 Gallons per flush Application



AUV-4

Package Includes

- ✓ Automatic Flush Valve
- ✓ 3/4" Stop Valve
- ✓ Supply Flange with Sweat Solder Adapter
- ✓ 3/4" - 8-1/4" Vacuum Breaker Assembly
- ✓ 3/4" Urinal Spud Coupling
- ✓ **Batteries Pre-installed**
- ✓ Full Cartridge with Batteries
- ✓ *All the hardware necessary for satisfactory installation*

Featuring

- ✓ Solid Brass Body.
- ✓ Piston Valving System.
- ✓ Integral, non-serviceable batteries.
- ✓ Three Serial Particle Strainers Built-In for Longer Life Expectancy.
- ✓ Hermetically Sealed Sensor and electronics.
- ✓ Replaceable valve cartridge for ease of service **(First of its Kind Worldwide).**
- ✓ **Available in 22 Finishes.**

Matching Products

- ✓ Automatic Faucet
- ✓ Automatic Soap Dispenser
- ✓ Automatic Hand dryer AC Power
- ✓ Automatic Towel Paper Dispenser
- ✓ Available in 22 Finishes

Applications

The **Model AUV-4 Automatic Urinal Flush Valve** is designed for commercial and industrial installations requiring longevity, reliability, and zero down time. Constructed with heavy-duty materials, the AUV-4 is engineered for long service life in highuse environments.

The AUV-4 is part of MAC Faucets new EvrLast product line. EvrLast products have a life expectancy measured in decades, not years. ***Almost*** every part that ***might*** become defective over time, including batteries, is housed in one easy to replace, high-reliability, all-in-one cartridge assembly. No diagnostics or guess work is needed. *It takes a layman less than 3 minutes to replace the cartridge, and there's no need to turn off the water.*

Flush volume and sensor distance is remote control adjusted.

Notes

MAC FAUCETS Paramount, CA. 866.558.3200 310.919.3073 www.macfaucets.com

MAC FAUCETS
When Style Matters


EvrLast™ Flush Valve
Model: AUV-4

Model: AUV-4-1.0 | 1.0 Gallons per flush Application
Model: AUV-4-0.5 | 0.5 Gallons per flush Application
Model: AUV-4-0.25 | 0.25 Gallons per flush Application
Model: AUV-4-0.125 | 0.125 Gallons per flush Application


Specifications and Dimensions

MODEL	AUV-4
Body:	Solid Brass
Stop:	Solid Brass
Vacuum Tube:	3/4"- 8-1/4" long with vacuum breaker
Power:	Integral, non-serviceable batteries.
Solenoid Valve:	6 Volt magnet latching
Working Water Pressure:	1 PSI -100 PSI
Water Inlet Size:	3/4" Pipe at stop
Water Outlet Size (Spud Coupling):	for Standard 3/4" Urinal Spud
Water Flow Control:	Yes, at Stop Valve, or requesting Specific Flush Cycle
Flush Cycle:	1.0 GPF, 0.5GPF, 0.25 GPF to 0.125 GPF depending on model
Valving System:	Piston type
Strainer:	50 Mesh
Sensor Type and Location:	Active Infrared, Body Mount
Sensor Microprocessor:	Digital, Plug And Play
Sensing Zone:	8" to 32" with optional remote control

All Dimensions in Inches

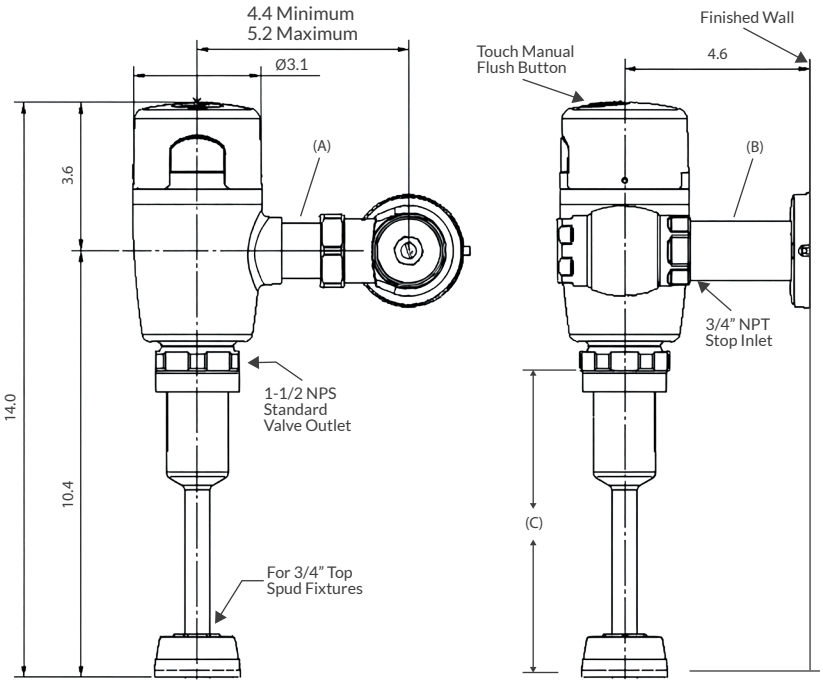

Over All Dimensions in Inches



(A)

Tailpiece	Dimensions	Part Number
Standard	2	R-69002
Extension	3	R-69003
Extension	4 1/16	R-69416
Extension	6 3/8	R-69638

(B)

Sleeve Tube	Dimensions	Part Number
Standard	3,5	R-65550
Extended	6	R-65550-EX
Extended	12	R-65312-EX

(C)

Vacuum Breaker Tube	Dimensions	Part Number
Standard	8,25	R-65600
Extended	15	R-65600-EX

MAC FAUCETS ◎ Paramount, CA. 866.558.3200 310.919.3073 www.macfaucets.com