MAC FAUCETS
When Style Matters

Specifications

EvrLast™ Replacement Cartridge
Model: R-690

For Flush Valves Models: ATV-4 & AUV-4



R-690

Package Includes

- ✓ Cartridge for Automatic Flush Valve
- ✓ **Batteries Pre-installed**
- ✓ Full Cartridge with Batteries and sensor
- ✓ *All the hardware necessary for satisfactory installation*

Featuring

- ✓ Manual override via touch sensor.
- ✓ Integral, non-serviceable batteries.
- ✓ Particle Strainer Built-In for Longer Life Expectancy.
- ✓ Hermetically Sealed Sensor and electronics and solenoid valve.

Applications

Replacement cartridge for ATV-4 and AUV-4. **One cartridge fits all flush rates.** The cartridge is an integral part of the ATV-4, containing the entire valving system, electronics, batteries, and critical components that may eventually require service. A two minute replacement task brings the function of the flush valve back to "as new" condition.

This Cartridge is designed for commercial and industrial installations requiring longevity, reliability, and zero down time. **Constructed with heavy-duty, fiber reinforced plastics and stainless steel materials,** the R-690 cartridge is engineered for long service life in high use environments.

Suggested Items

- ✓ Automatic Faucets
- ✓ Automatic Soap Dispensers
- ✓ Automatic Hand Dryers AC Power
- ✓ Automatic Towel Paper dispensers
- ✓ Available in 22 Finishes

Notes

MAC FAUCETS Paramount, CA. 866.558.3200 310.919.3073 www.macfaucets.com

MAC FAUCETS
When Style Matters


EvrLast™ Replacement Cartridge
Model: R-690

For Flush Valves Models: ATV-4 & AUV-4

Specifications and Dimensions

MODEL	R-690
Body:	Plastic with 25% Fiber Glass
Power:	Integral. 8 AAA Non-Serviceable Batteries
Solenoid Valve:	6 Volt Magnet Latching
Working Water Pressure:	1 PSI - 100 PSI
Water Flow Control:	Yes, at the Flush Valve Stop Valve and with Optional Remote control
Flush Cycle Time:	6 Seconds by Default
Valving System:	Piston Type
Strainer:	50 Mesh
Sensor Type and Location:	Active Infrared, body mount
Sensor Microprocessor:	Digital, Plug and Play
Sensing Zone:	8” to 32” with optional remote control
Flush Rate:	From 0.125 GPF to 1.60 GPF (Flush rate is regulated by the brass hardware). Changing the cartridge will not change the flush valve rate. One cartridge for all flush rates

All Dimensions in Inches

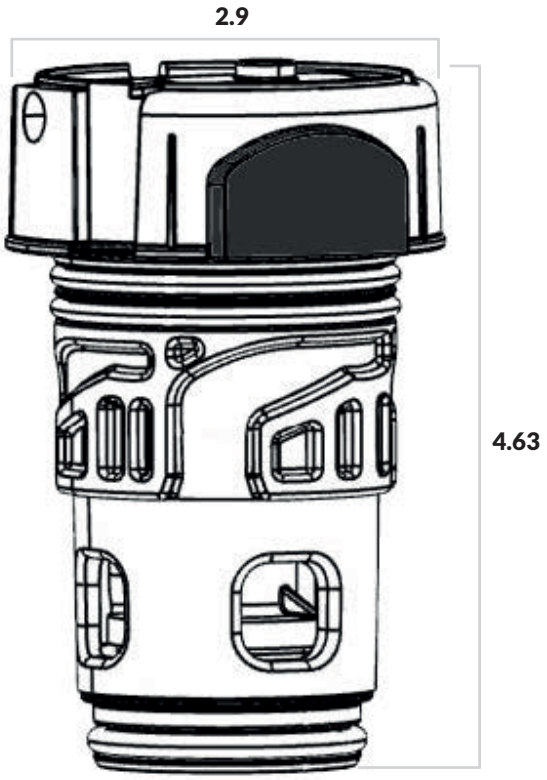

MAC FAUCETS Paramount, CA. 866.558.3200 310.919.3073 www.macfaucets.com