

Specifications



TiO-324

Optional Equipment

- ✓ Large Capacity Soap Container
- ✓ Lavatory Drain, Grid and Push-Push Type
- ✓ Deck Plates for 4" and 8" Center Sinks
- ✓ Adjustable Under the Sink Mixing Valve
- ✓ Matching Hole Cap Cover
- ✓ AC Power
- ✓ Remote Control for the Soap Dispenser



Two-in-One Automatic Faucet Automatic Soap Dispenser

Model: TiO-324

Package Includes

- ✓ Faucet
- ✓ Solenoid Valve
- ✓ Stainless Steel Hose
- ✓ Soap Dispenser Pump Unit
- ✓ 800ml Soap Bottle
- ✓ Mounting Hardware
- ✓ **Batteries Pre-installed**
- ✓ All the hardware necessary for satisfactory installation
- ✓ **Please Note:** Faucet Sold Without Drain

Featuring

- ✓ Solid Brass Body
- ✓ Dispenses Standard Liquid Soap
- ✓ Flow Adjustment Capability
- ✓ Resin Encased Control Electronics
- ✓ Battery powered, A/C Option
- ✓ Visible Low Battery Indicator.
- ✓ **Available in 22 + Finishes**
- ✓ ADA Compliant
- ✓ Requires a Single Hole in Countertop for Installation
- ✓ State of The Art Valving and Pumping Systems
- ✓ US Green Building 1/4 Gallons per Cycle Compliant



ANSI A112.18.1M
CSA Standard B125, 1.5 U.S. GPM
NSF/ANSI/CAN61-2022 **Certified**

Applications

The model TiO-34 2 in 1 is ideal for decorative commercial and industrial applications. This unique faucet is rated **HEAVY DUTY** and, employs plug-and-play digital electronics, a hermetically sealed sensor capsule with a visible low battery indicator, as well as one of the most reliable solenoid valves of any electronic faucet.


Notes




Specifications and Dimensions

MODEL	TIO-32
Spout:	Lead-Free Solid Brass
Power:	4 (D) Alkaline Batteries or AC Adapter - Optional
Faucet Solenoid Valve:	6 volts Low Power Consumption Magnet Latching
Sensor Type:	Active Infrared
Sensor Range:	2"
Working Water Pressure:	1 PSI - 100 PSI
Response Time:	0.6 Second
Shut-Off Delay Time:	3.0 Seconds
Maximum Running Time:	30 Seconds
Water Temperature Control:	Optional - Choose MAC no. A-12910
Sink Drain:	Optional - Many to Choose From
Aerator:	1.5 GPM. Optional 0.5 GPM
Electronic Soap Dispenser:	On The same Body
Sensor:	Infrared
Sensing Range:	2" to 6" Adjustable with a Optional Remote Control
Working Soap:	Standard Liquid Soap, NO Grit Industrial Soap

All Dimensions in Inches

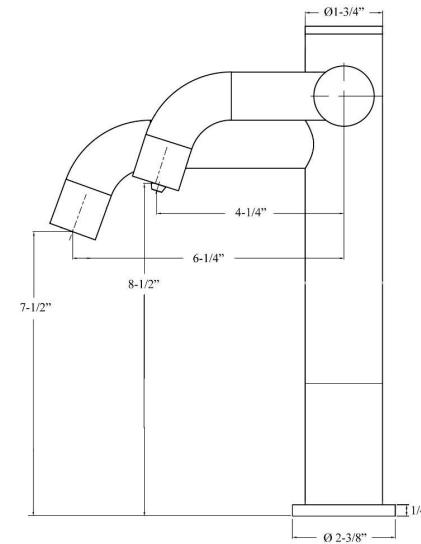

Rough-in

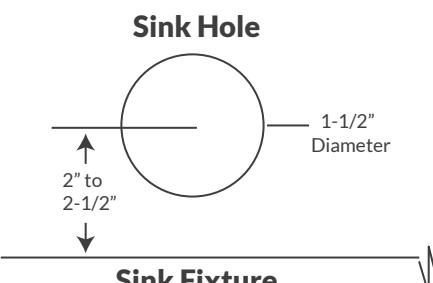

Countertop Thickness: Up to 2-1/2"

Available: Extra Long Shanks for Thicker Countertops Please call before ordering