

MAC FAUCETS

When Style Matters

Specifications



Two-in-One Automatic Faucet Automatic Soap Dispenser

Model: TiO-34



TiO-34



LEAD FREE



Meets EPA Criteria



Package Includes

- ✓ Faucet
- ✓ Solenoid Valve
- ✓ Stainless Steel Hose
- ✓ Soap Dispenser Pump Unit
- ✓ 800ml Soap Bottle
- ✓ Mounting Hardware
- ✓ **Batteries Pre-installed**
- ✓ *All the hardware necessary for satisfactory installation*
- ✓ **Please Note:** Faucet Sold Without Drain

Featuring

- ✓ Solid Brass Body
- ✓ Dispenses Standard Liquid Soap
- ✓ Flow Adjustment Capability
- ✓ Resin Encased Control Electronics
- ✓ Battery powered, A/C Option
- ✓ Visible Low Battery Indicator.
- ✓ **Available in 22 + Finishes**
- ✓ ADA Compliant
- ✓ Requires a Single Hole in Countertop for Installation
- ✓ State of The Art Valving and Pumping Systems
- ✓ US Green Building 1/4 Gallons per Cycle Compliant



ANSI A112.18.1M
CSA Standard B125, 1.5 U.S. GPM
NSF/ANSI/CAN61-2022 **Certified**

Optional Equipment

- ✓ Large Capacity Soap Container
- ✓ Lavatory Drain, Grid and Push-Push Type
- ✓ Deck Plates for 4" and 8" Center Sinks
- ✓ Adjustable Under the Sink Mixing Valve
- ✓ Matching Hole Cap Cover
- ✓ AC Power
- ✓ Remote Control for the Soap Dispenser

Applications

The model TiO-34 2 in 1 is ideal for decorative commercial and industrial applications. This unique faucet is rated **HEAVY DUTY** and, employs plug-and-play digital electronics, a hermetically sealed sensor capsule with a visible low battery indicator, as well as one of the most reliable solenoid valves of any electronic faucet.

Notes

www.macfaucets.com



310.919.3073



866.558.3200



Paramount, CA.

MAC FAUCETS

MAC FAUCETS

When Style Matters




Two-in-One Automatic Faucet Automatic Soap Dispenser

Model: TiO-34

Specifications and Dimensions

MODEL	TIO-32
Spout:	Lead-Free Solid Brass
Power:	4 (D) Alkaline Batteries or AC Adapter - Optional
Faucet Solenoid Valve:	6 volts Low Power Consumption Magnet Latching
Sensor Type:	Active Infrared
Sensor Range:	2"
Working Water Pressure:	1 PSI - 100 PSI
Response Time:	0.6 Second
Shut-Off Delay Time:	3.0 Seconds
Maximum Running Time:	30 Seconds
Water Temperature Control:	Optional - Choose MAC no. A-12910
Sink Drain:	Optional - Many to Choose From
Aerator:	1.5 GPM. Optional 0.5 GPM
Electronic Soap Dispenser:	On The same Body
Sensor:	Infrared
Sensing Range:	2" to 6" Adjustable with a Optional Remote Control
Working Soap:	Standard Liquid Soap, NO Grit Industrial Soap

All Dimensions in Inches

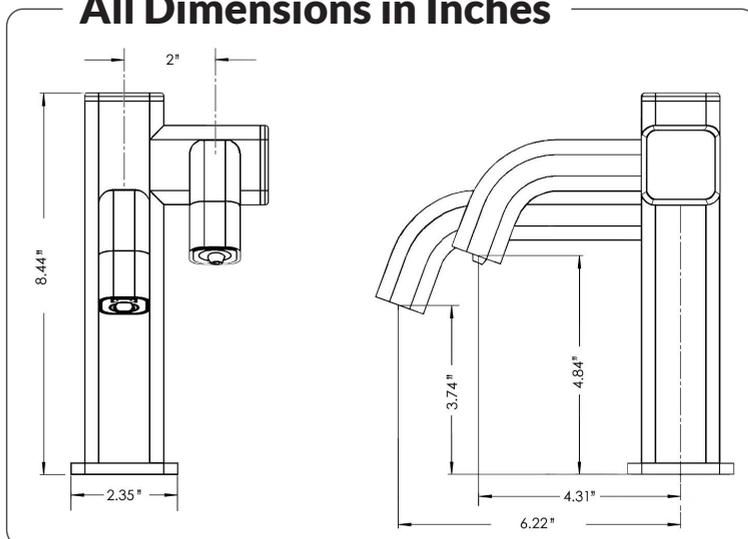

Rough-in

